



C-POSTS SCREWED BACK-TO-BACK
(or TO 65mm POSTS) USING 8x
10gx16mm TEK SCREWS SPACED
300mm APART

PROFILED PLASTIC CAP
(NOT SHOWN) FITTED
OVER C-POSTS

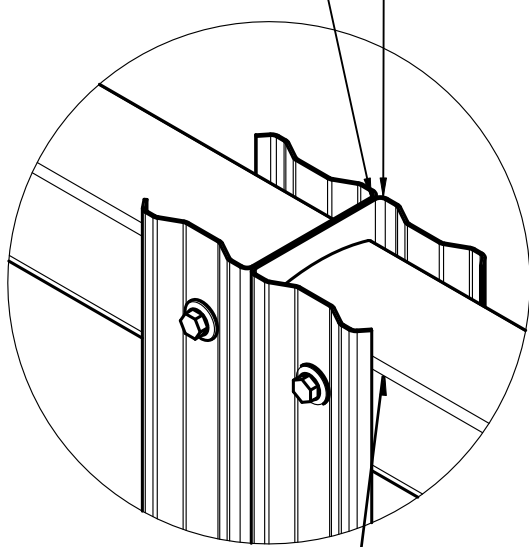

RAILS SCREWED INTO C-POSTS
USING 2x 10gx16mm TEK SCREWS

6

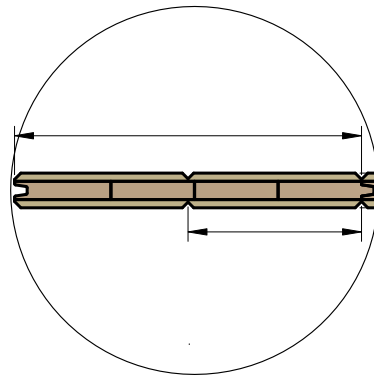

65x65 FLANGED POST

'GOOD GROUND'
100kpa ALLOWABLE
BEARING AS DEFINED
BY NZS:3604

1830 POST CENTRES

1800

137.5

CONCRETE 17.5mpa MIN

SLOPE TOP OF CONCRETE TO
ALLOW WATER TO DRAIN
AWAY FROM POST

65x65
IN-GROUND
POSTS

300 DIA
or 250x250 SQUARE

100

Fentec

Terranota Ltd. P.O. Box 1703 Invercargill 1703
Telephone: 0800 002 725
Email: sales@fentec.co.nz
Website: www.fentec.co.nz

Model

EasyWall Horizontal
Panel 1800mm
FEWH100

Rail profile

50mm roll-formed steel EasyWall rail

Post caps

External plastic profiled caps

/

65x50mm roll-formed steel EasyWall c-post

Flanged post

65x65x1900mm pre-galvanised powdercoated
steel (125mm square flange) M12 fixings

Panel length

1830x1800mm

hground post

65x65x2500mm pre-galvanised powdercoated steel

Size
A4

Date issued
2023-03-31

Rev

**DO NOT SCALE
DRAWING**

Sheet
1 of 1

Weight

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS