




65x65 Steel end and corner post when required (FSP6525) fastened to C-post (FCCP2400)


C-posts fastened back to back as line posts (FCCP2400)

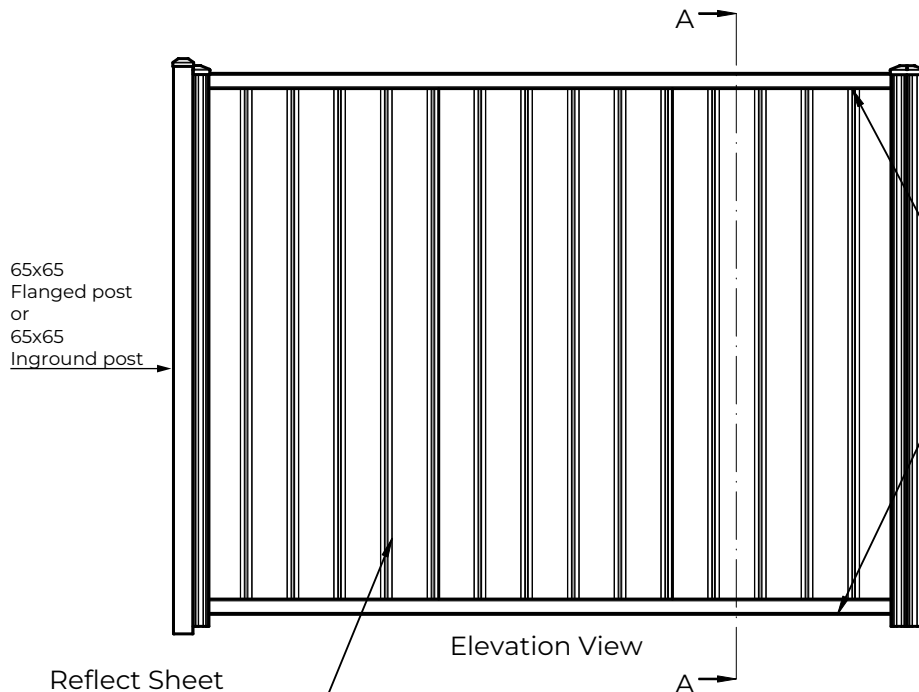


65x65 Flanged post or 65x65 Inground post

Rail (FCRL2400) x2 per bay, top and underside

Reflect Sheet (FCRS1500) requires 3 per bay



Section View A - A

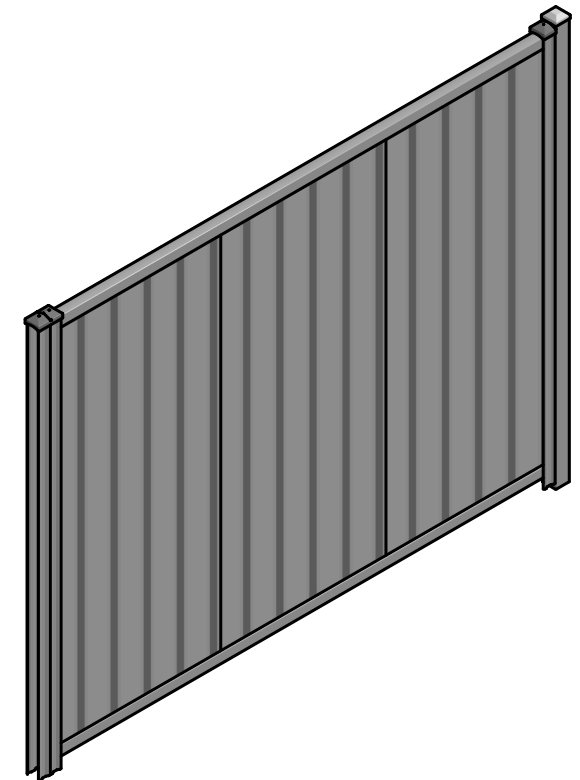

Fentec

Terranota Ltd. P.O. Box 1703 Invercargill 1703
Telephone: 0800 002 725
Email: sales@fentec.co.nz
Website: www.fentec.co.nz

Model

ColourWall 1500mm
FCPC1500

C-Rail profile

50mm roll-formed steel ColourWall rail

Post caps

External plastic profiled caps

C-Post profile

65x50mm roll-formed steel ColourWall C-post

Flanged post

65x65x1600mm, 125mm square flange, pre-galvanised steel powdercoated to match, M12 fixings

Panel length

2380mm wide x 1500mm high

In-ground post

65x65x2500mm pre-galvanised steel powdercoated to match

Size
A4

Date issued
2023-03-31

Rev

**DO NOT SCALE
DRAWING**

For use on swimming pools, external balconies or retaining walls, please refer to our producer statements for further specifications

Sheet
1 of 1

Weight

Unless otherwise specified, dimensions are in millimetres